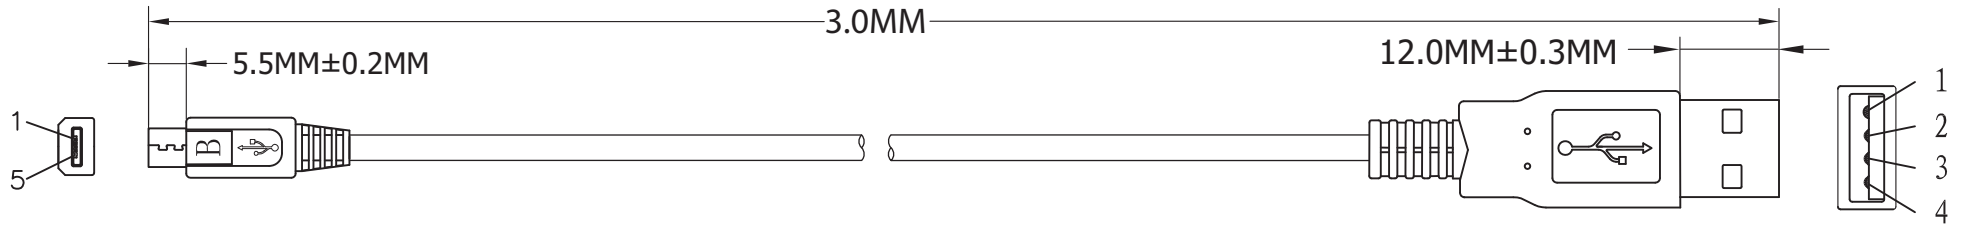
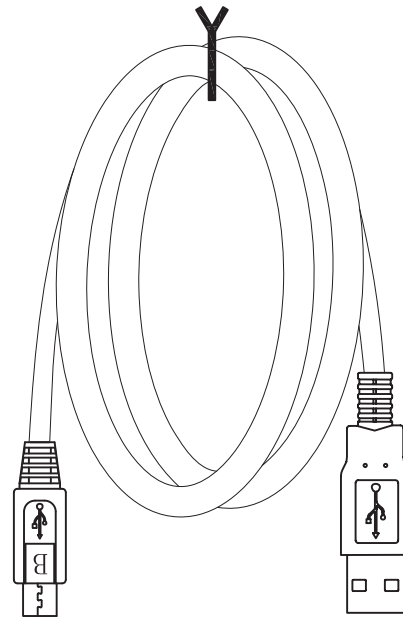



**P2****P1**

PIN ASSIGNMENT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	4
SHELL	DRAIN + BRAID	SHELL

**Material:**

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)\*1P+28AWG(7/0.12TC)\*2C]+AEB(48B TC)
  - Jacket: Black
  - OD: 3.5MM
- P1 Connector: Micro USB 5P B/M Solder Type
  - Shell: Nickel
  - Pin: G/F
  - Insulator Color: Black
  - Outer Jacket: Black PVC-50P
- P2 Connector: USB A Male
  - Shell: Nickel
  - Pin: G/F
  - 3PCS Type
  - Insulator Color: White
  - Outer Jacket: Black PVC-40P

**Electrical:**

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC

⊕ = Assmann logo

**RoHS**  
Compliant

ITEM NO.

**AK67421-3-R**

TITLE

 USB2.0 Micro Connection Cable, 3 Meters  
 USB B Micro Male <=> USB A Male

**ASSMANN**  
 Electronics, Inc.

 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • eMail: info@assmann.us

 THIS DRAWING IS UNPUBLISHED  
 ©Copyright 2009 by Assmann Electronic Components  
 All International Rights Reserved