

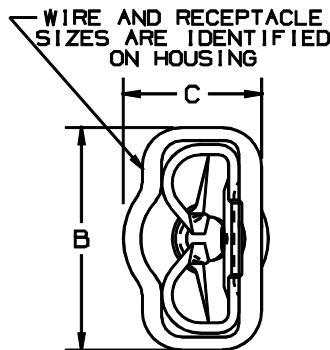


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

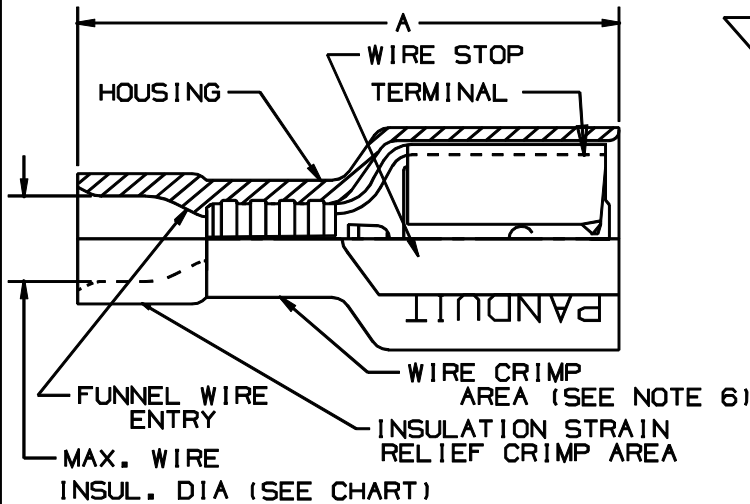


SECTION VIEW OF CRIMPED DISCONNECT

NOTES:

- USED FOR:
 - A: 600V MAX VOLTAGE RATING
 - B: 221°F (105°C) MAX TEMP RATING
 - C: STRANDED COPPER WIRE ONLY
 - D: 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
- PACKAGE QTY: -M=1000 PIECES -D=500 PIECES
-C=100 PIECES -L=50 PIECES
- MATERIAL:
 - A. STAMPING-CDA 260 BRASS, TIN PLATED
 - B. HOUSING-PREMIUM GRADE NYLON FOR SUPERIOR STRAIN RELIEF INSULATION CRIMPING
- DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- NYLON HOUSING IS OPAQUE
- THE DPF10-250F1 IS CONSTRUCTED WITH AN ADDITIONAL BRASS SLEEVE IN THE CRIMP AREA

PART NUMBER	PKG. SUFFIX	TAB SIZE	WIRE RANGE AWG (mm) ²	COLOR (note 5)	MAX. WIRE INSULATION DIAMETER	MIN. WIRE INSULATION DIAMETER	DIMENSIONS in.			WIRE STRIP LENGTH	TOOL CHART
							A ±.03 (1.8)	B ±.01 (1.3)	C ±.01 (1.3)		
DPF18-250F1B	-C -M	.250 X .032 (6.3 X 0.8)	22-18 (0.5-1.5)	RED	.133 (3.38)	.080 (2.03)	.84 (21.3)	.35 (8.9)	.22 (5.6)	9/32 ^{+1/32} -0 (7.1 ^{+0.8} -0)	CT-520 CT-1525
DPF18-205F1B	-C -M	.205/.187 X .032 (5.2/4.8 X .8)	22-18 (0.5-1.5)	RED	.133 (3.38)	.080 (2.03)	.78 (19.8)	.31 (7.9)	.22 (5.6)		
DPF18-206F1B	-C -M	.205/.187 X .020 (5.2/4.8 X .5)	22-18 (0.5-1.5)	RED	.133 (3.38)	.080 (2.03)	.78 (19.8)	.31 (7.9)	.22 (5.6)		
DPF14-250F1B	-C -M	.250 X .032 (6.3 X 0.8)	16-14 (1.5-2.5)	BLUE	.156 (3.96)	.090 (2.29)	.84 (21.3)	.35 (8.9)	.22 (5.6)		
DPF14-205F1B	-C -M	.205/.187 X .032 (5.2/4.8 X .8)	16-14 (1.5-2.5)	BLUE	.156 (3.96)	.090 (2.29)	.78 (19.8)	.31 (7.9)	.22 (5.6)		
DPF14-206F1B	-C -M	.205/.187 X .020 (5.2/4.8 X .8)	16-14 (1.5-2.5)	BLUE	.156 (3.96)	.090 (2.29)	.78 (19.8)	.31 (7.9)	.22 (5.6)		
DPF10-250F1B	-L -D	.250 X .032 (6.3 X 0.8)	12-10 (4.0-6.0)	YELLOW	.220 (5.59)	.140 (3.56)	.96 (24.4)	.35 (8.9)	.23 (5.8)	3/8 ^{+1/32} -0 (9.5 ^{+0.8} -0)	CT-1525
DPF10-250F1*	-L -D	.250 X .032 (6.3 X 0.8)	12-10 (4.0-6.0)	YELLOW	.218 (5.54)	.140 (3.56)	.95 (24.1)	.36 (9.1)	.27 (6.9)	3/8 ^{+0.8} -0 ^{+1/32} -0 (9.5 ^{+0.8} -0)	CT-1550 CT-1551 CT-550



*DPF10-250F1 IS NOT UL LISTED OR CSA CERTIFIED

A41462_06

06	6/98	TM		ADDED CT-1525, AND DPF10-250F1B				<p>TINLEY PARK, ILLINOIS</p> <p>DISCOGRIP™ LOOSE PIECE FULLY INSULATED FEMALE DISCONNECTS .250 X .032, .205 X .032/.020</p>			
05	10/96	TM	RLS	UPDATED NOTES AND DIMENSIONS	05138	LA	DH				
04	6/95	MS	RLS	ADDED DPF10-250F1	03351	LA	KS				
03	10/94	TH	RLS	UPDATED NOTES AND DIMENSIONS	02555	LA	KS				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY KRC	Ck'D LA	SCALE NONE	DRAWING NO./CAD FILENAME 41462A