

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

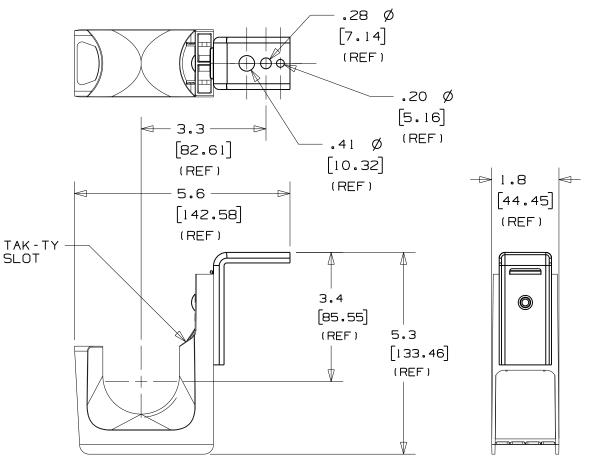

PANDUIT PART NO.	WEIGHT bs / 10 (g) / pcs					
JP2CM	2.57 (1165.7)					

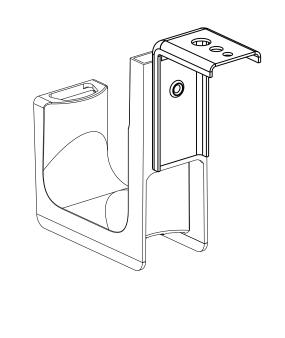

NOTES:

- 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
- 2. HOOK MATERIAL: NYLON 6/6
 - ANGLE BRACKET MATERIAL: PRE-GALVANIZED STEEL,
 - RIVET MATERIAL: ALUMINUM
- 3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 2" (50.8) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 30 lbs.
- 4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
- 5. PRODUCT MARKINGS:
 - cULus logo and statement:
 - "SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."

 ULC logo and statement:
 - "IN ACCORDANCE WITH CAN/ULC S-102.2 IN SINGLE UNITS OR PAIRS, 4 ft (1220mm) MIN. SPACING, FSR:0. SDC:20."

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

10K016BA_DC_GB2888FB/01A



TINLEY PARK, ILLINOIS

J-PRO CEILING MOUNT J-HOOK (JP2CM-___)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25) (.XX) ±0.02 (0.5) ANGLES ± 5*

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

014	10/26/10	APW	JASM	REVISED DIMENSIONS, UPDATED TO TEAMCENTER FORMAT	GB2888FB	OIA	KLN			DRAWN BY JAD	MAT'L:
1	12/14/05	JAD		REVISED, RE-RELEASE WITH New Geometry	GB2888FB	l				DATE 5/5/04	SE
REV	DATE	ВҮ	СНК	DESCRIPTION	ECN -	R	CUST	SUP	ос	KLN KLN	

SEE NOTE 2

IN INCHES, THIRD ANGLE PROJECTION.

SCALE NONE

DRAWING NO.

DWG

SIZE

GB2888FB