

## JACKPAC JPP NPN PNP 24VDC

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



The JPP level converters convert NPN signals into PNP signals and vice versa. This guarantees optimum adaptation to existing circuits.

### General ordering data

Order No.	<a href="#">8852350000</a>
Type	JPP NPN PNP 24VDC
Version	JACKPAC, Level converter, Rated control voltage: 18...24...30 V DC, Rated switching voltage: 18...30 V DC, Rated switching current: 400 mA, M12 plug/socket, A-coded
GTIN (EAN)	4032248567355
Qty.	1 pc(s).

**JACKPAC  
JPP NPN PNP 24VDC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Length	83 mm	Width	36 mm
Height	14.4 mm	Net weight	52 g

**Temperatures**

Operating temperature	0 °C...+60 °C	Storage temperature	-20 °C...+85 °C
-----------------------	---------------	---------------------	-----------------

**Control side**

Rated control voltage	18...24...30 V DC	Sensor	2-/ 3-Conductor Sensor NPN-type
Input current for sensor	< 200 mA		

**Load side**

Rated switching voltage	18...30 V DC	Rated switching current	400 mA
Voltage drop at max. load	≤ 1 V		

**General data**

Solid-state type	Solid state relay	No. of poles	1
Conductor connection system	M12 plug/socket, A-coded	Standards	DIN EN 50178, UL508

**Insulation coordination**

Rated voltage	32 V	Pollution severity	2
Surge voltage category	I		

**Further details of approvals**

Standards	DIN EN 50178, UL508
-----------	---------------------

**Classifications**

ETIM 3.0	EC001134	UNSPSC	30-21-18-01
eClass 5.1	27-27-09-90	eClass 6.0	27-27-09-90
eClass 7.0	27-27-09-90		

**Notes**

Notes

**Approvals**

Approvals

**Downloads**

Declaration of Conformity [K270\\_06\\_06.pdf](#)  
[3-D model](#)

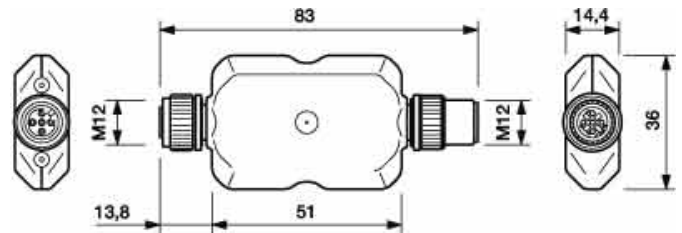
Creation date March 6, 2013 10:41:00 PM CET

Catalogue status 20.12.2012 / We reserve the right to make technical changes.

2

**JACKPAC  
JPP NPN PNP 24VDC**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings****Dimensioned drawing****Pinning**