


## FSMD1210 Series

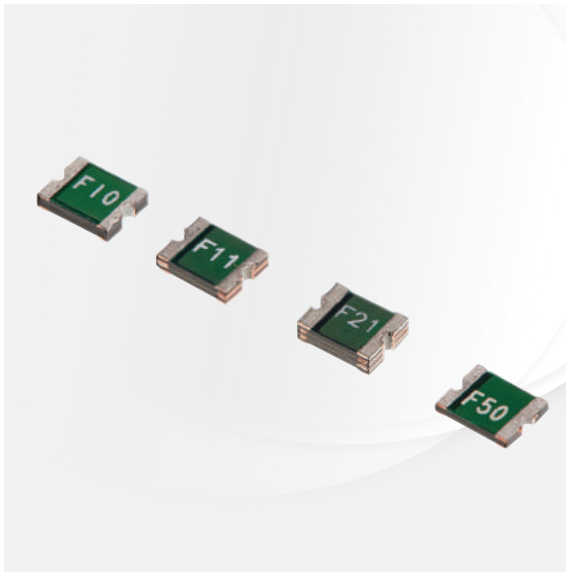

### Application

All high-density boards

### Product Features

Small surface mount, Solid state Faster time to trip than standard SMD devices Lower resistance than standard SMD devices



### Operation Current

0.05A~2.00A

### Maximum Voltage

6V~60V<sub>DC</sub>



### Temperature Range

-40°C to 85°C

### Agency Recognition

AGENCY	AGENCY FILE NUMBER
	UL(E211981)
	C-UL(E211981)
	TÜV (R50090556)



SVHC Compliant

### Electrical Characteristics (23°C)


Part Number	Hold Current I <sub>H</sub> , A	Trip Current I <sub>T</sub> , A	Rated Voltage V <sub>MAX</sub> , V <sub>DC</sub>	Max. Current I <sub>MAX</sub> , A	Typ. Power Pd, W	Max. Time to trip		Resistance	
						Current A	Time Sec	R <sub>MIN</sub> Ohms	R <sub>1MAX</sub> Ohms
FSMD005-1210-R	0.05	0.15	60	100	0.60	0.25	1.50	3.600	50.000
FSMD010-1210-R	0.10	0.25	60	100	0.60	0.50	1.50	1.600	15.000
FSMD020-1210-R	0.20	0.40	30	100	0.60	8.00	0.02	0.800	5.000
FSMD035-1210-R	0.35	0.70	16	100	0.60	8.00	0.20	0.320	1.300
FSMD050-1210-R	0.50	1.00	16	100	0.60	8.00	0.10	0.250	0.900
FSMD075-1210-R	0.75	1.50	8	100	0.60	8.00	0.10	0.130	0.400
FSMD075-24-1210R	0.75	1.50	24	100	0.60	8.00	0.10	0.130	0.400
FSMD110-1210R	1.10	2.20	8	100	0.80	8.00	0.30	0.060	0.210
FSMD110-16-1210R	1.10	2.20	16	100	0.80	8.00	0.30	0.060	0.210
FSMD150-1210R	1.50	3.00	6	100	0.80	8.00	0.50	0.040	0.110
FSMD175-1210R	1.75	3.50	6	100	0.80	8.00	0.60	0.020	0.080
FSMD200-1210R	2.00	4.00	6	100	0.80	8.00	1.00	0.015	0.070

### Thermal Derating for PPTC Device at Various Ambient Temperatures


TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	83%	76%	70%	62%	50%

### Typical Time-To-Trip at 23°C

- A = FSMD005-1210-R
- B = FSMD010-1210-R
- C = FSMD020-1210-R
- D = FSMD035-1210-R
- E = FSMD050-1210-R
- F = FSMD075-1210-R / 075-24-1210R
- G = FSMD110-1210R / 110-16-1210R
- H = FSMD150-1210R
- I = FSMD175-1210R
- J = FSMD200-1210R

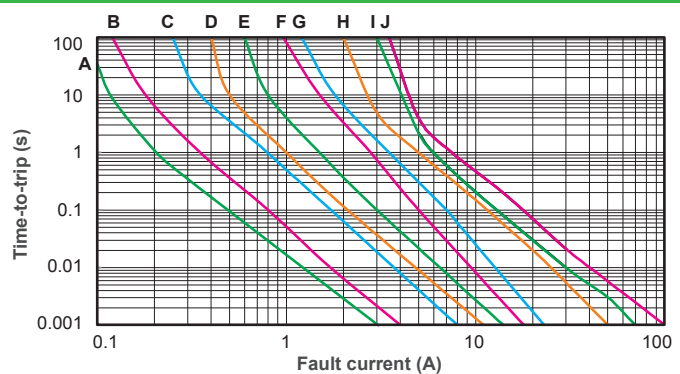


## FSMD1210 Product Dimensions (mm)

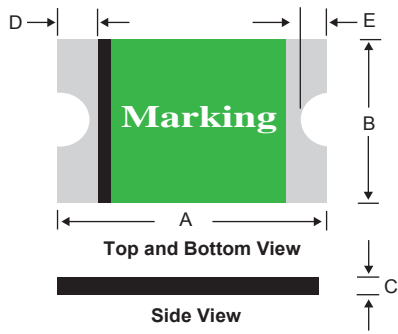



Part Number	A		B		C		D		E	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
FSMD005-1210-R	3.00	3.43	2.35	2.80	0.60	1.15	0.25	0.75	0.10	0.45
FSMD010-1210-R	3.00	3.43	2.35	2.80	0.60	1.15	0.25	0.75	0.10	0.45
FSMD020-1210-R	3.00	3.43	2.35	2.80	0.40	0.85	0.25	0.75	0.10	0.45
FSMD035-1210-R	3.00	3.43	2.35	2.80	0.40	0.80	0.25	0.75	0.10	0.45
FSMD050-1210-R	3.00	3.43	2.35	2.80	0.30	0.75	0.25	0.75	0.10	0.45
FSMD075-1210-R	3.00	3.43	2.35	2.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD075-24-1210R	3.00	3.43	2.35	2.80	0.80	1.20	0.25	0.75	0.10	0.45
FSMD110-1210R	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD110-16-1210R	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD150-1210R	3.00	3.43	2.35	2.80	0.50	0.90	0.25	0.75	0.10	0.45
FSMD175-1210R	3.00	3.43	2.35	2.80	0.80	1.40	0.25	0.75	0.10	0.45
FSMD200-1210R	3.00	3.43	2.35	2.80	0.80	1.40	0.25	0.75	0.10	0.45

\*For Reflow Soldering Profile information, please refer to P.75 " VIII APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS "

## Part Numbering System

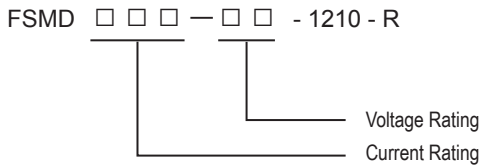

## Part Marking System

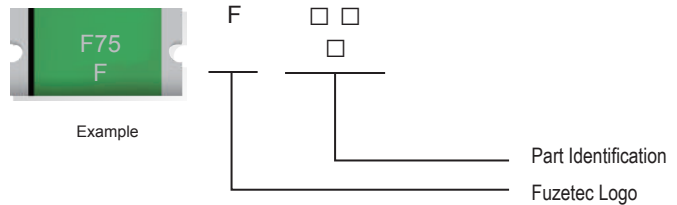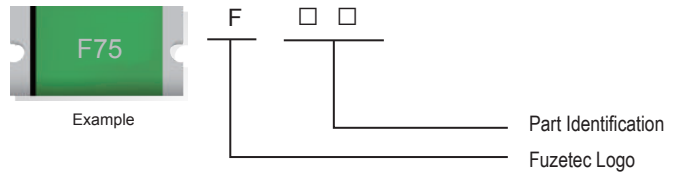

## Package Information

Part Number	Standard Package
FSMD005-1210-R~FSMD020-1210-R	3.0K Reel/Tape
FSMD035-1210-R~FSMD075-1210-R	4.0K Reel/Tape
FSMD075-24-1210R~FSMD200-1210R	3.0K Reel/Tape

## Physical specifications

Termination pad materials	Pure Tin
Soldering characteristics	Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3

### Warning :



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.