
		<h2 style="text-align: center;">Device Programmers and Development Tools for Microcontrollers</h2>				
Home	Products	E-Shop	Support	Contact	News	Site Map

**Quick Links**

- Help Desk
- Downloads
- All Programmers
- Device Search
- Tools Catalogs

 **Shopping Cart**

Items: 0

Total: \$0.00

Your Account

---


**Products**

- Development Tools
- ARM
- 8051
- Other
- Device programmers
- All Models
- Universal
- In-System
- Gang
- Adapters
- Custom made tools
- OEM tools

### AE-B88-NM1

---

**DIP40/BGA88 specialized adapter for FLASH memory.**

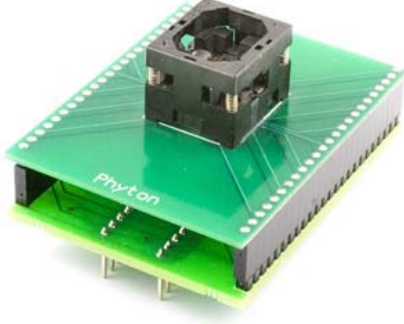

**Description:**

DIP40/BGA88 specialized adapter for FLASH memory. Device package dimensions: 11.0 x 8.0 x 1.2(1.0) mm, 0.8 mm pitch.

**Supported Devices:**

Click the device programmer model below to get an appropriate list of the devices supported by this programmer with this adapter:

- [ChipProg-48](#)
- [ChipProg-G4](#)
- [ChipProg-40](#)
- [ChipProg+](#)

[Adapter wiring diagram](#)

**Adapter Connection Table:**

DIP -40	BGA-64	U1, 74AHC573	U2, 74AHC573	C1, 150pF	C2, 0.1uF
1	L3,K7,J8				
2	G8				
3		11	11	1	
4	F4				
5	D3				
6					
7	F5				
8	G7				
9	D4				
10	E2				
11	F2				
12	C1				
13	B1				
14	D1				
15	E1				
16	F1				
17	G1				
18					
19	H8				
20	L1,L2,L5,L6,L7,L8,B4,C4,E5,C6	1, 10	1, 10	2	2
21	K1				
22	J2				
23	H2	2			
24	G2		2		
25	H3	3			
26	J3		3		
27	G3	4			
28	G4		4		
29	H4	5			
30	J4		5		

	31	J5	6		
	32	H5		6	
	33	G5	7		
	34	G6		7	
	35	J6	8		
	36	H6		8	
	37	H7	9		
	38	J7		9	
	39				
	40	L4,B5,B6,K6,E4	20	20	1
		C3		12	
		C7		13	
		E8	12		
		F7	13		
		D8	14		
		C8	15		
		B8	16		
		E7	17		
		D7	18		
		F6	19		
		B3		16	
		E6		15	
		B7		14	
		B2		17	
		D2		18	
		F8		19	

Copyright © 2007-2010 Phytion, Inc.

Phone: 718-259-3191 • E-mails: [info@phyton.com](mailto:info@phyton.com), [sales@phyton.com](mailto:sales@phyton.com), [support@phyton.com](mailto:support@phyton.com)