

RECOMMENDED P.C.B LAYOUT
TOLERANCE:±0.05, UNLESS SPECIFIED



- NOTE:
1. INSULATOR: LCP, BLACK COLOR
 2. USB CONTACT: BRASS 0.15MM THICK, 30U" GOLD PLATING ON CONTACT AREA, GOLD FLASH PLATED ON SOLDER TAIL, 80U" MIN. NICKEL UNDERPLATING OVERALL
 3. SHELL: STAINLESS STEEL, 0.3MM THICK, GOLD FLASH PLATED ON THE SOLDERING TAB
 4. ALL CONNECTOR DIMENSION TOLERANCE: ±0.2, UNLESS OTHERWISE SPECIFIED

MICRO USB 3.0-B SMT TYPE

EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	
ACAD REFERENCE NO. 690-010-295-484		DATE: JUN.8/2010	
DRAWN: R.STA.MONICA		DATE:	
CHECKED:		DATE:	
SCALE: NOT TO SCALE		SHEET 1 OF 2	
DRAWING NUMBER 690-010-295-484		ISSUE 2	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR ROHS COMPLIANCY

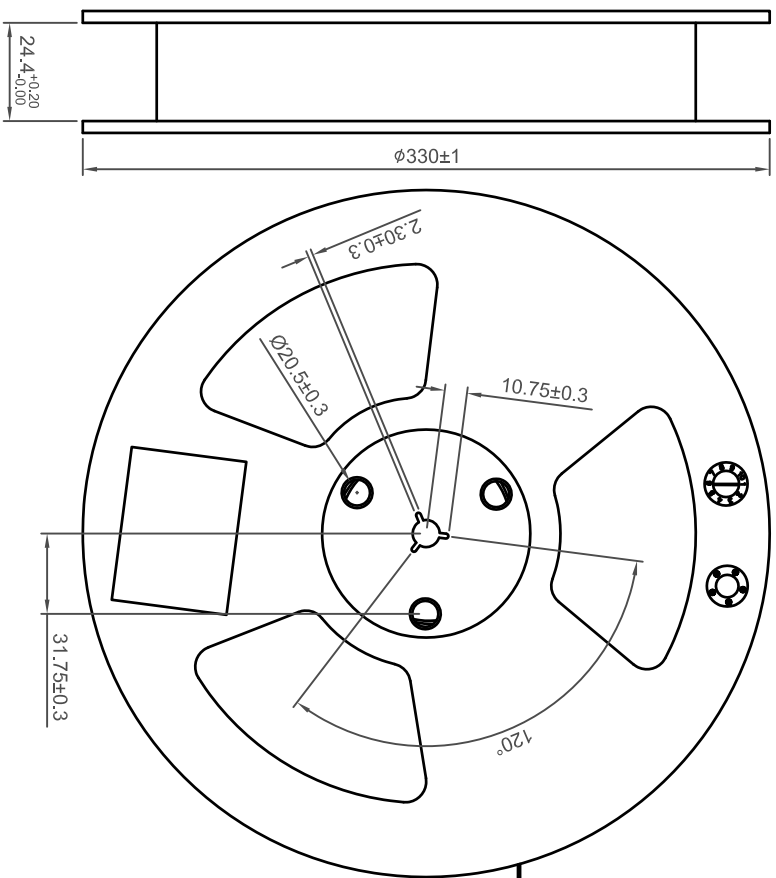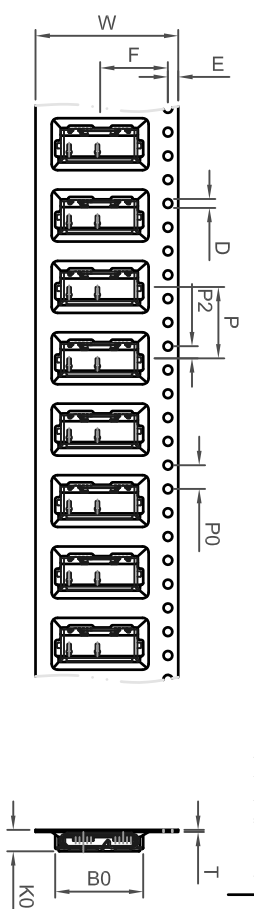

ITEM	W	F	P	P2	PO
DIM	24.0±0.3	11.4±0.1	12.0±0.1	2.03±0.1	4.0±0.1

ITEM	D	E	BO	KO	AO	T
DIM	1.5±0.1	1.75±0.1	14.80±0.1	3.6±0.1	6.2±0.1	0.35±0.05

- NOTE:
1. TAPE MATERIAL: PS
 2. TAPE LENGTH: 18.6 METERS
 3. TOTAL 1500PCS PRODUCT SPACES (13" REEL)

**MICRO USB 3.0-B SMT TYPE
 TAPE AND REEL PACKAGING**

		EDAC INC TORONTO, ONTARIO CANADA	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			
ACAD REFERENCE NO.	690-010-295-484	DRAWN:	R.STA.MONICA
CHECKED:		DATE:	JUN.10/2010
SCALE:	NOT TO SCALE	SHEET	2 OF 2
DRAWING NUMBER	690-010-295-484	ISSUE	2

YOUR CONNECTION TO QUALITY & SERVICE